

# TECHNICAL DATA SHEET

## SURGICAL SCRUB SINK

### Sinks



JRV A/S offers sinks in 2 standard sizes:

Description:

- Sink made of stainless steel, AISI 304.
- Sound-absorbing front plate.
- Dimension for connecting drain: 1 1/2".



Single sink, width 600 mm.

item no. 907170

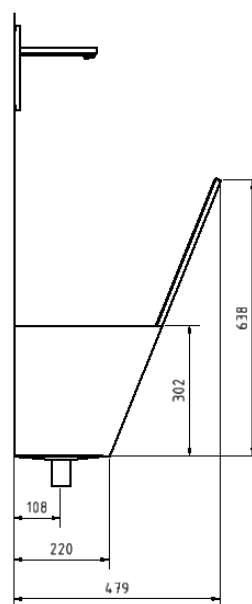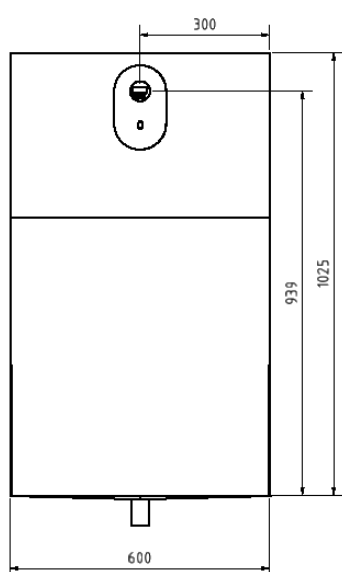

Dual sink, width 1200 mm.

Item no. 907171

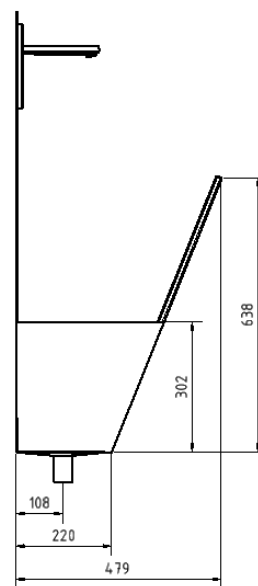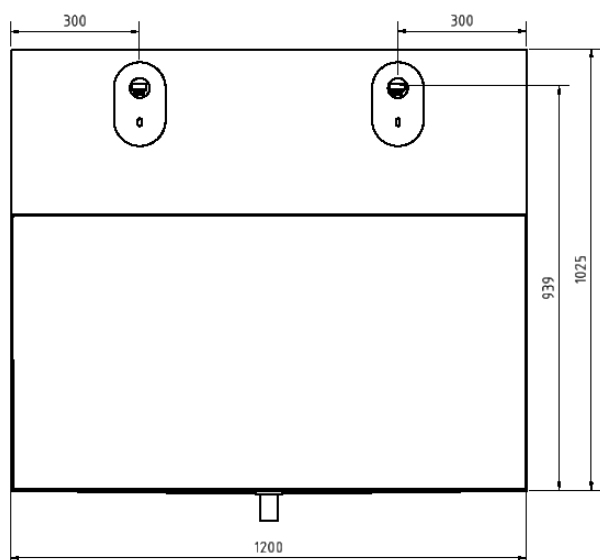

## Fixture

*Note: Grohe fixture is an additional purchase.*

JRV A/S offers Grohe fixture without mixing valve with net operation.

### Fixture. item no. 907177


Brand: GROHE

#### Description:

GROHE infrared electronic fixture without mixing valve, for wall mounting.

#### Description:

- With infrared sensor for monitoring, configuration and service purposes
- Too cold or premixed water
- With transformer 100-230 V AC, 50-60 Hz, 6 V DC
- GROHE EcoJoy mousseur 5.7 l/min
- Rosette, chrome
- Chrome outlet
- Spout 172 mm
- Preset Programs:
- Automatic rinse
- Thermal disinfection
- Cleaning function
- Mounting kit for built-in box
- 36 336 001/36 337 001
- CE approved
- Sound class I according to DIN 4109
- Min. pressure 1.0 bar

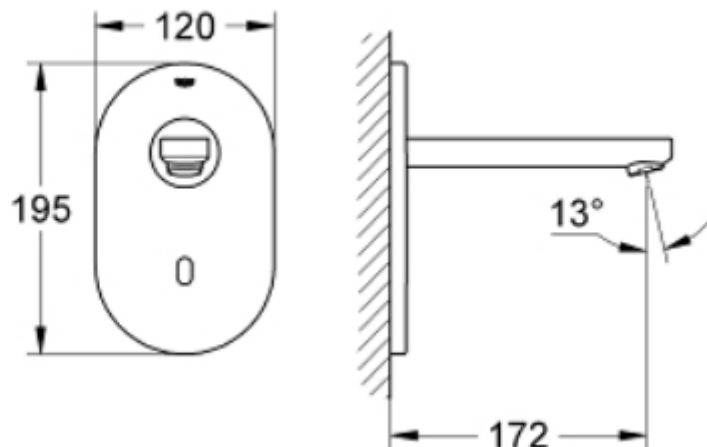

*The above data is obtained from Grohe. We reserve the right to make changes / corrections. Data can be downloaded from [www.grohe.dk](http://www.grohe.dk)*

## Assembly glue

*Note: Assembly glue is an additional purchase. It is a PU-based elastic mass with high adhesion. Certain surfaces require the use of a primer.*

### Properties:

- Gray glue and seal for assembly, content 290 ml.
- Does not contain silicone.
- Persistently elastic.
- Vibration and sound dampening.
- Non-corrosive: Prevents corrosion of the metal.
- The product is approved for use in connection with foodstuffs (ISEGA certificate).
- Adheres well to materials such as wood, metal, concrete, stone, lacquered surfaces, PVC and PETG.
- Does not adhere to polyethylene (PE), polypropylene (PP), PTFE, silicone, rubber, polystyrene and soft plastic.
- Can be overpainted with most varnishes, but not alkyd-based paint. **ATTENTION!** Attempts should be made before.
- Resistant to sea and lime water, weak acids and lye as well as water-based cleaning fluid.
- Short-term resistant to fuel, mineral oil, vegetable and animal oil.

Technical data	
Basis	Polyurethane base
Shelf life	1 year unopened at +10 to +25 °C
Membrane formation	Approx. 1 hour at +23 °C and air 50%
Shore A (hardness)	Approx. 40.
Density	Approx. 1.25 g/cm <sup>3</sup>
Regeneration after compression	Approx. 90 %
Processing temperature	+5 to +35 °C
Temperature resistant after curing	-40 to +90 °C
Curing time	Approx. 3 mm. per 24 hours +23 °C and humidity 50 %
Elasticity	10 %
Fracture elongation	Min. 500 %

*The above data is obtained from Würth. We reserve the right to make changes / corrections. Data can be downloaded from [www.wuerth.dk](http://www.wuerth.dk)*

## Built-in box and Leakage Protection

*Legally required.*

According to the Approval of water and drainage installations (VA approval) regarding hidden joints, it is required that an built-in box and leakage protection are being purchased and installed.

### Built-in Box. Item no. 907178

Brand: GROHE

Description:

- GROHE Euroeco Cosmopolitan E
- Built-in box for installation
- Installation in wall
- For connecting premixed water or cold water
- Fits IR mounting kit
- Pre-blocking
- Connection box for power supply
- Fits: 36 410 000, 36 334 SD0, 36 335 SD0, 36 273 000
- Enables waterproofing of wall construction around the hidden installation
- Wall membrane is included




### Leakage Protection. Item no. 907179

Brand: GROHE

Approval/markings: VA 1.99/18008

Description:

- Leakage protection
- Fits Rapido T (35 500), Rapido E (35 501) and Rapido SmartBox (35 600)
- Delivered in sets of 2 pcs.

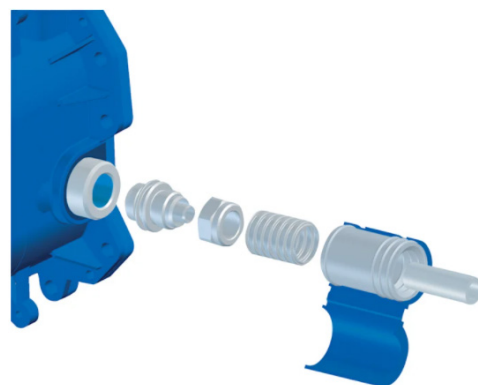

*The above data is obtained from Brødrene A&O Johansen A/S. We reserve the right to make changes / corrections. Data can be downloaded from [www.ao.dk](http://www.ao.dk)*